


ART 1/G+/48 DUAL POE hands free audio unit.



Reference: ART 1/G+
Product code: 12310140
EAN code: 8429898023472

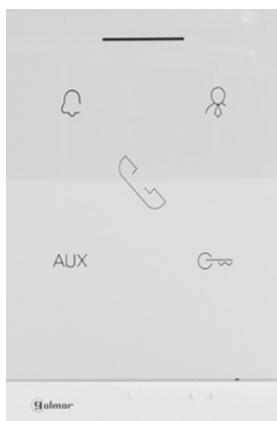

Main characteristics

- TCP/IP protocol "G+" digital installation.
- Casing manufactured in polished ABS white colour.
- Capacitive touch buttons with acoustic confirmation on press.
- Surface installation. Depth without strip 15mm, depth with strip 23mm.
- Includes mounting connector.

Dimensions: 89(W) x 138(H) x 15(D) mm.

More information

- Possibility to power it locally at 12Vdc, at 18Vdc using D4L-G+/PoE or DCP/G+ and DCS/G+, or at 48V standard PoE.
- Duplex audio communication.
- Privacy on audio and door open progresses.
- Do not disturb function with light indication.
- Input for door bell apartment push button.
- Different call reception tones depending where the call is coming from.
- Volume adjustment.
- Output to auxiliary call repeater.
- Intercommunication with other monitors in the same apartment.
- Additional push button can be used to activate a second lock connected to the door panel.

Visit in the website: <https://golmar.es/products/art-1-g-plus>

Golmar Sistemas de Comunicación S.A.

Silici 13 • 08940 Cornellà de Llobregat (Barcelona) • Tel: +34 934 800 696 • Fax: +34 934 742 404 • golmar@golmar.es • www.golmar.es

Specifications	
Type of device	Audio
Serie	ART
Mounting	Surface
Audio of communication	Hands-free, Full-duplex
Call type	Individual call
Vocal messages	No
Ringtones	6
Speaker power (W)	0.8
Intercom	Inside the apartment
Units in parallel (max.)	6
Integrated WiFi	No
Remote Access / App	Web
Operation	Soft Touch Push Button
Number of buttons	5
I / O audio	No
Inductive loop	No
Guidance LEDs	Yes
Response time (ms.)	25
Log of calls	Yes
Management software	Yes
Programming	Computer
HW platform	Linux
Protocols	TCP / IP
Volume settings.	1
Input voltage (V)	12Vcc, PoE, 18Vcc
Requires additional feeder	No
Rest consumption (W)	2.5
Max. consumption (W)	2.7
Installation	UTP
Max. (M)	100
Compatibility	Golmar, IP SIP, VoIP
Technology	IP G +
Functions	Do not disturb, Call to concierge, Auto start, Automatic answer, Dr. Function
Inputs	HZ
Outputs	Auxiliary ringer, 12Vdc
Removable connectors	No
Built-in microphone	Yes
Microphone sensitivity (DB)	40
Degree of protection (IP)	30
Relative humidity work (max.)	90
Relative humidity Work (min.)	10
Maximum working temperature (°C)	40
Minimum working temperature (°C)	-10
Mounting frame included	Yes
Material	ABS plastic
Dimensions - Width (mm)	89
Dimensions - High (mm)	138
Dimensions - Deep (mm)	15
Colour	White
Weight (gr.)	130

Accessories

- SOB-UNI table stand

Visit in the website: <https://golmar.es/products/art-1-g-plus>